



FOG LIGHTS

(2005-2012 MUSTANG GT)

INSTALLATION INSTRUCTIONS

CONTENTS

(2) Fog Lights

TOOLS REQUIRED


7mm Socket & Ratchet
Phillips Head Screwdriver

STEP 1 (05-09)



Using a flat head screwdriver or trim panel removal tool, remove the (6) push pins securing the radiator cover to the car. Remove the radiator cover and set aside.

STEP 1 (10-12)

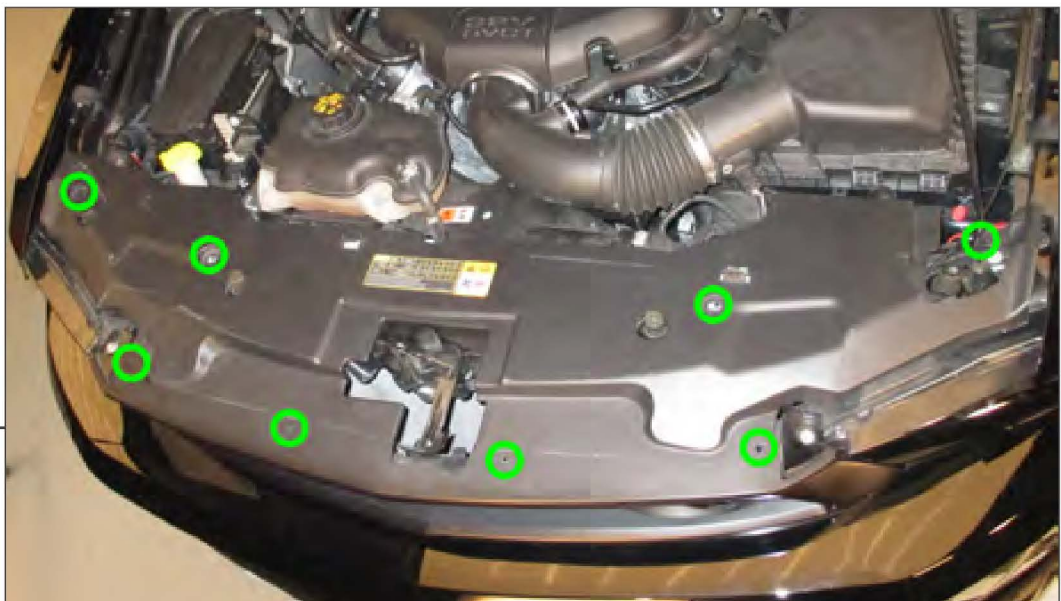

Using a flat head screwdriver or trim panel removal tool, remove the (8) push pins securing the radiator cover to the car. Remove the radiator cover and set aside.

STEP 2 (05-09)



Press in on one side of the grille, to relieve pressure, while prying the clip inward towards the center of the vehicle. There are also clips along the bottom of the grille. Once the sides are released, pull outward on the grille, slowly increasing pressure until the clips release. **TO AVOID DAMAGE, LINE THE PAINTED SURFACES IN FRONT OF THE GRILLE WITH A FEW ROWS OF PAINTERS TAPE.**

STEP 2 (10-12)



Press in on one side of the grille, to relieve pressure, while prying the clip inward towards the center of the vehicle. There are also clips along the bottom of the grille. Once the sides are released, pull outward on the grille, slowly increasing pressure until the clips release. **TO AVOID DAMAGE, LINE THE PAINTED SURFACES IN FRONT OF THE GRILLE WITH A FEW ROWS OF PAINTERS TAPE.**

STEP 3




Press down on the electrical connector to release the fog light harness from the fog lights.

STEP 4




Remove the (8) 7mm screws securing the fog light mounts to the grille. The 05-09 grille shown above, the 10-12 fog lights mount similarly.

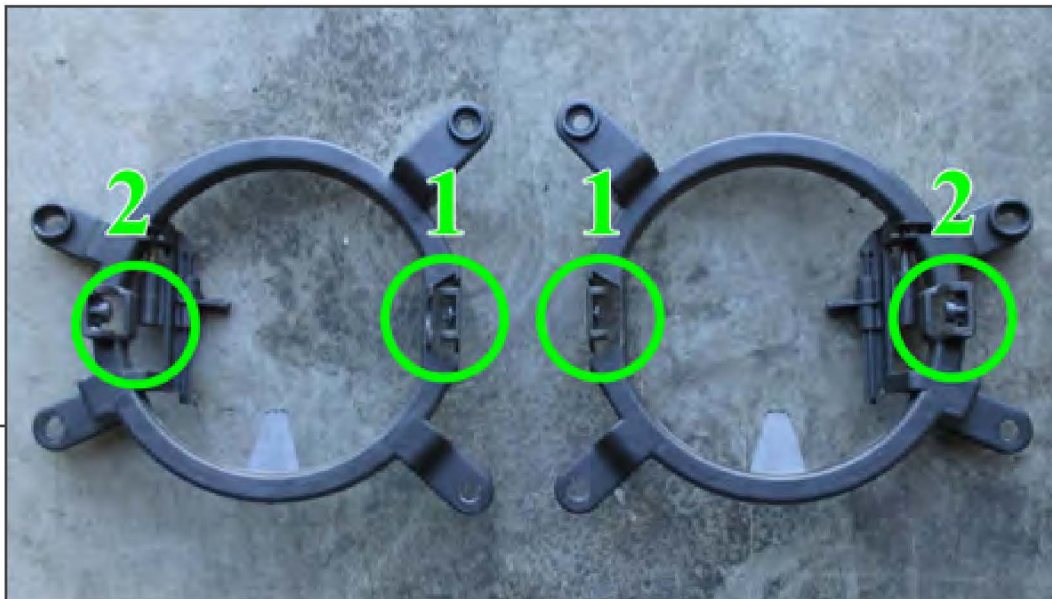

STEP 5

Fog lights have been removed for illustration purposes. Pull the inner mount tab (1) away from the fog light. Once the fog light is clear of mounting tab (1), it will easily slide off mounting tab (2). Reinstall the Raxiom Fog Lights in reverse order. When installing the fog lights, make sure the air vent opening is facing down.

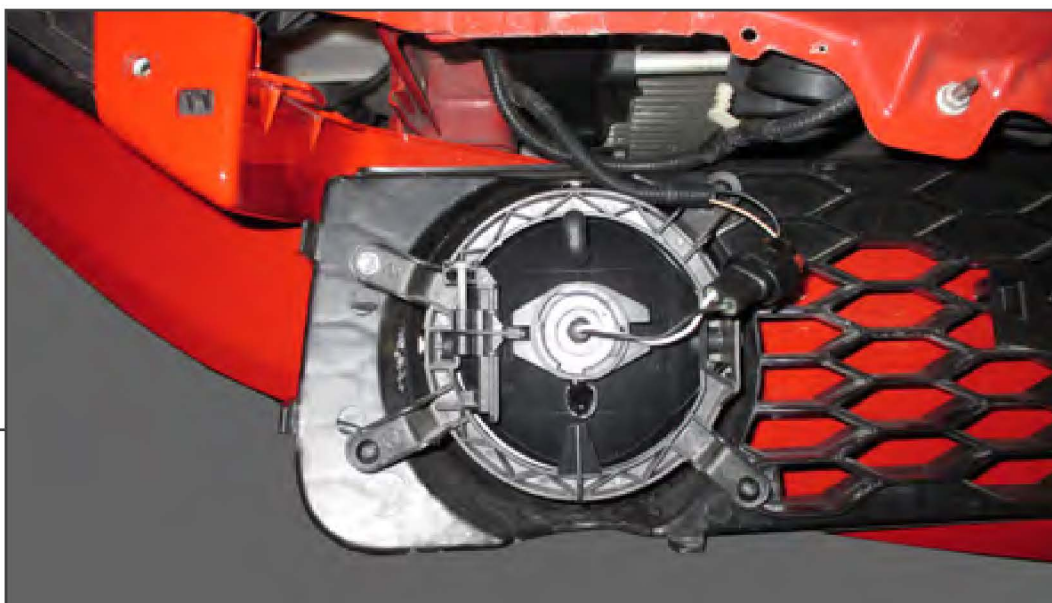

STEP 6

Reinstall the light mounts using the factory hardware. Plug the vehicle harness into the back of the lights and clip the grille back into the car, making sure the wires aren't near the radiator or other sharp/hot parts. Connect the negative battery cable and make sure the lights are working. There is a screw on the back side of the fog lights that can be turned to adjust the beam up/down.