



HOOD VENT

(2018-2020 MUSTANG GT, ECOBOOST)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH Hood Vent
- (1) RH Hood Vent
- (1) LH Honeycomb Insert
- (1) RH Honeycomb Insert
- (2) Alcohol Pads

TOOLS REQUIRED


- Detailer/Soap
- 9mm Socket & Ratchet
- Trim Panel Removal Tool
- Flat Head Screw Driver

STEP 1



Begin by thoroughly cleaning the hood of your vehicle with automotive soap and water. Next, remove the inner hood liner push rivets to remove the liner and gain access to the hood vent.

STEP 2

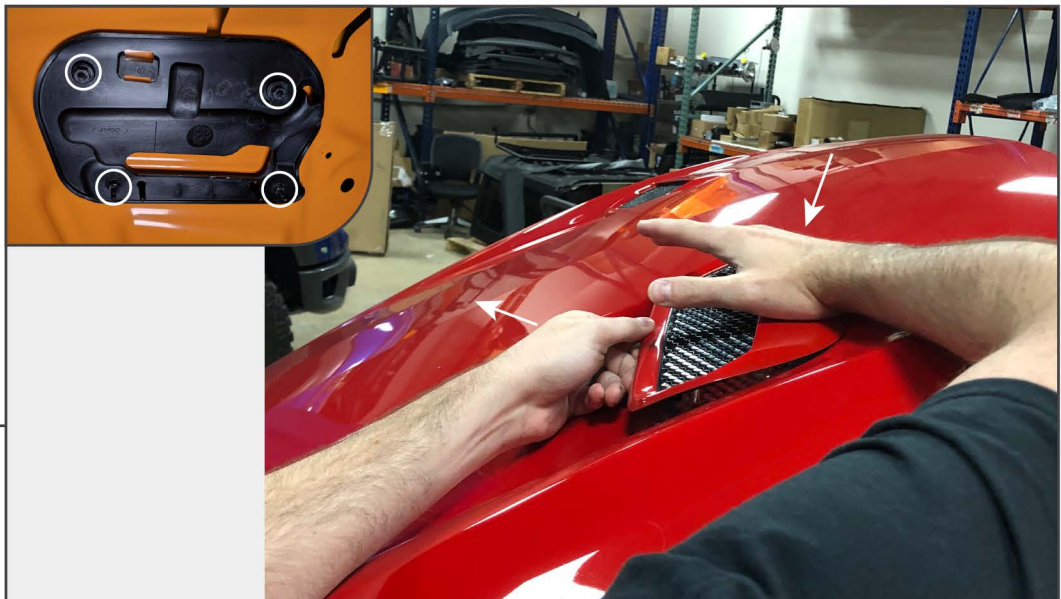

Remove the (4) 9mm nuts holding the factory vent in place. While lifting the rear edge of the vent, press down and back, towards the windshield, to release the clip on the front of the vent.

STEP 3



Using a flat head screw driver, remove the inner vent cover from the factory vent by releasing the plastic tabs in the locations shown above.

STEP 4



Remove the (4) studs from the vent, these studs will be reused.

STEP 5



Remove the tape backing on the honeycomb insert. Make sure the corners of the insert sit flush with the edge of the hood vent and do not stick above. Once you have the insert lightly in place, press firmly to fully seat the adhesive.

STEP 6




Install the inner vent cover, removed in Step 3, onto the new hood vent. Be sure that all the clips snap into place.



STEP 7

Using the supplied alcohol pads, clean the area where the tape will make contact with the hood surface.

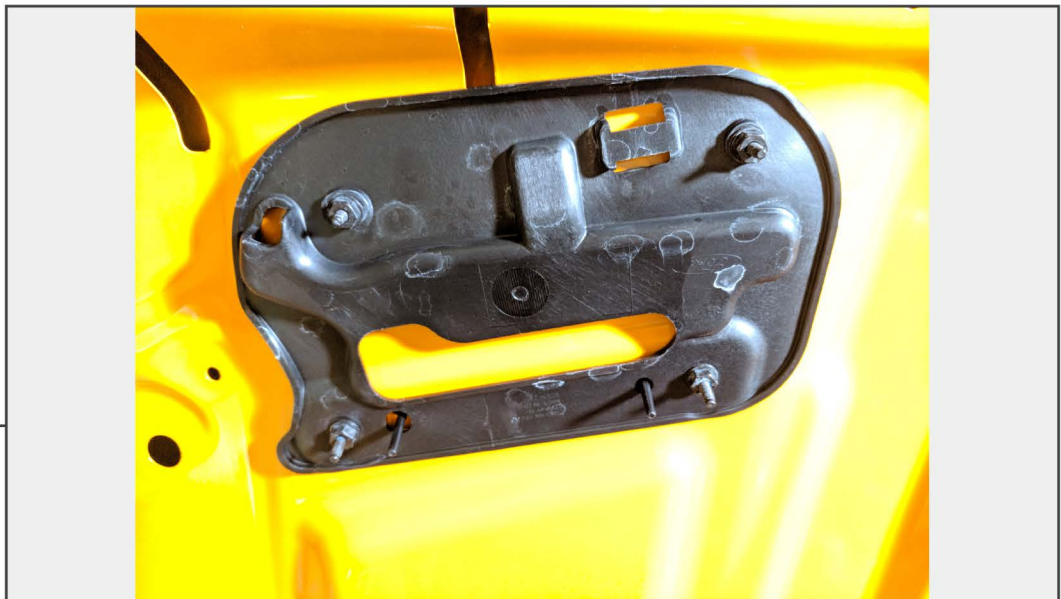

STEP 8

Remove the backing from the tape on the hood vent. Insert the hood vent into the hood, and secure using the factory (4) nuts. Press firmly on the taped area to fully seat the adhesive.



STEP 9

Repeat these steps for the opposite side to complete the installation.