

**Contents:**

- (1) Hood
- (1) Hood Liner
- (1) Honeycomb Insert
- (9) Push Clips

**Tools Required:**


- 10mm, 15mm Sockets
- Ratchet
- Panel Removal Tool

**GT350 Style Hood  
(15-17) V6, EcoBoost, GT**

Begin by raising the hood to gain access to the under hood insulation. Remove the (15) push pins that hold the insulation liner to the hood.




Locate the Squirter nozzles, and remove by carefully prying away from the hood and disconnecting the hose.

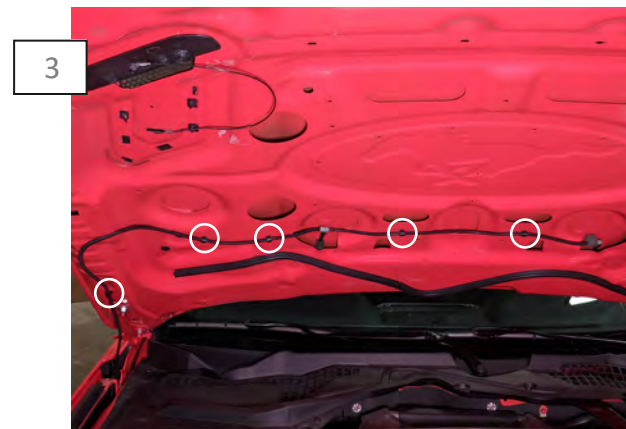

Using a trim panel removal tool, remove the (5) push clips holding the windshield washer line to the hood.



Remove the (2) 15mm nuts on both sides of the hood. **\*\*Note:** It is best to have a helper help steady the hood and remove. Also be sure to have a safe place to lay the hood down.

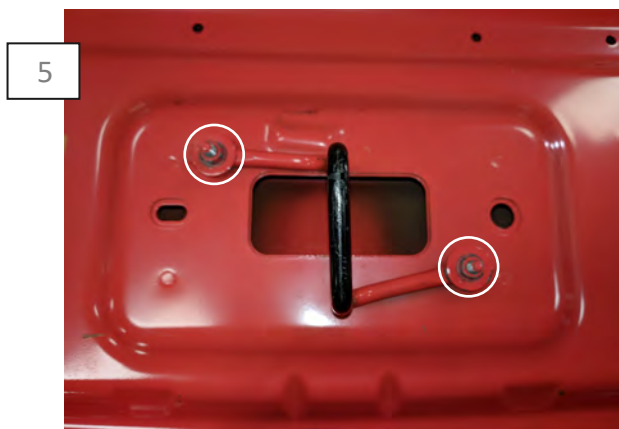

Remove the factory hood latch by removing the (2) 10mm nuts.



Using a trim panel removal tool, carefully remove the push clips securing the weather stripping to the hood. Once removed, transfer the weather stripping and clip into place on the new hood.

7



Install the hood latch to the new hood using the factory 10mm nuts.

8



Install the honeycomb grille insert into hood slot by gently applying firm pressure snapping the insert into place.

9



With a helper, install the hood using the factory (4) 15mm nuts. Be sure to properly align the hood with the body lines of the vehicle. You may have to repeat this a few times to achieve desired fitment. Then reinstall the windshield washer fluid line, and nozzles. **\*\*Note:** Be careful opening and closing the hood when aligning for proper fitment so damage does not occur to the paint.

10



Install the supplied hood insulation liner using the (9) push clips. Installation is complete.