

MP CONCEPTS

Step 1:

Jack the vehicle up and support the front end with jack stands.

Step 2:

Using a trim panel removal tool, remove the (8) plastic clips securing the plastic radiator cover to the support and remove it from the vehicle.




Step 3:

Remove the (6) 8mm bolts, and (2) 6mm screws securing the bumper cover



Step 4:

Support the front of the car so you can access the bumper splash shield. **Note there are two versions of the splash shield. Both are attached in similar locations

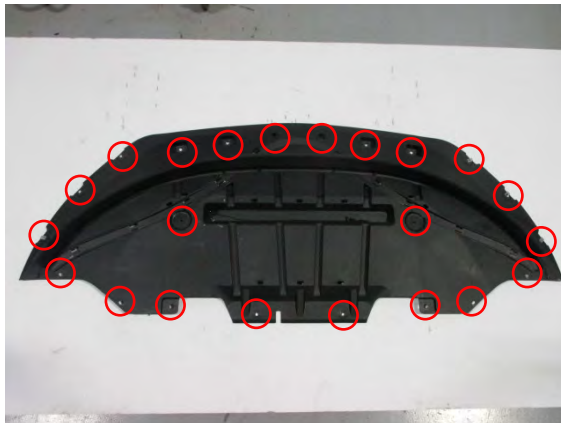

Step 5:

On each side of the bumper, remove the plastic clips holding the fender liner to the bumper.



18+ Shark Bite Grille

Contents:

- (1) Shark Bite Grille
- (1) Control Box
- (1) Wireless Key Fob

Tools Required:

- Jack & Jack Stands
- 7mm, 8mm, 10mm Sockets
- Ratchet
- Trim Panel Removal Tool
- Flat Head Screw Driver

Step 6:

From the top between the fender, locate and remove the (2) 10mm nuts. **Note: Using an extension and swivel may be necessary.



Step 7:

With the splash shield removed, you can access the plugs for the turn signals and fog lights. Unplug all (3) plugs.



Step 8:

Once the bumper cover is ready to remove, using firm pressure pull the edge of the bumper down to pop it from the clip. Have a helper support one side so that you don't scratch the paint. Slowly remove the bumper and support it on a soft non-abrasive surface.



Step 9:

Begin by removing the plastic bumper brace. Gently bend tabs as needed to remove support.




Step 10:

Next you will remove the factory grille by manipulating the tabs with a trim panel removal tool so that you can pull the grille away from the bumper cover. **Note this can be a little tricky take your time.



Step 11:

Install the Shark Bite grille making sure all clips are properly aligned. Once all clips are aligned use firm pressure to snap the grille into place.

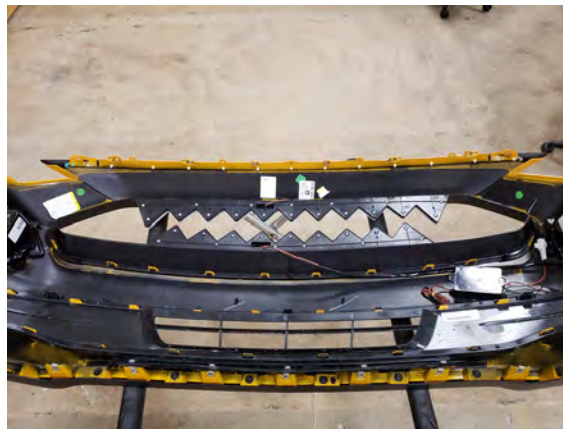

Step 12:

Neatly route the control box wiring harness along the frame rails to the battery and secure with zip ties where necessary. Connect the Red 12v+ wire to the positive battery terminal, and the Black 12v- wire to the negative battery terminal. Zip tie the control box to the frame rail.



Step 13:

Reinstall the front bumper in reverse order. Installation is now complete.