

2018+ Hood Vents

Tools Required: - 9mm Socket & Ratchet
- Panel Removal Tool or Pliers


Contents: 2 - Hood Vents
4 - Inserts
1 - Tape Kit



Remove the hood liner push pins and remove the liner to gain access to the factory hood vent mounting nuts.



Remove the (4) 9mm nuts holding the factory vent in place. Then gently remove the factory vent from the hood.

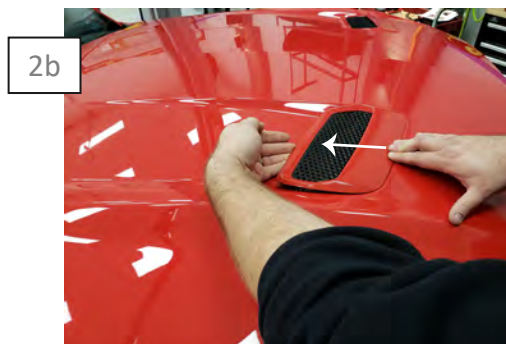

Carefully pull up on the back of the hood vent while gently pushing the front to release the factory clip securing the hood vent to the hood. Remove hood vent.



Remove the factory hood vent cover from the factory vent by releasing the plastic tabs and pulling away from the vent to release the tape adhesion.



Remove the (4) factory studs from the factory vent.

****Note** factory studs will be reused.




Install the supplied tape to the inserts area as shown above. ****Note:** Some trimming of the tape will be necessary.

6a



Inserts will be labeled R-I for Right Inner, R-O for Right Outer, L-I for Left Inner, and L-O for Left Outer. Remove the tape backing for each insert.

6b

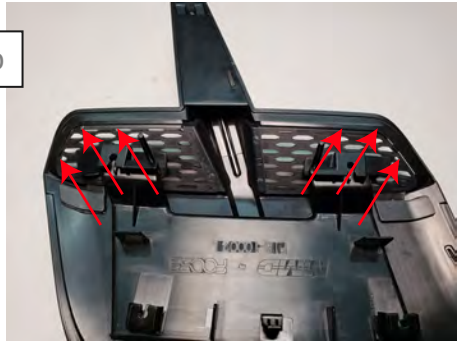

Insert the insert in an upward position to meet with the upper edge, and then apply firm pressure to the taped areas.

7



Install the supplied tape to the areas shown above.
**Note: Some trimming of the tape will be necessary.

8



Install the factory hood vent cover from Step 3 onto the new hood vent by applying pressure till they click into place.

9



Remove the tape backing from step 7, and insert the hood vent into the hood. Secure hood vent using the factory (4) nuts.

10



Apply firm pressure over taped areas. Installation is now complete.