



Tools Needed:

Tire Chocks
Needle Nose Channel Locks

Contents:

(1) Clutch Spring

15-19 Clutch Spring

Step 1:

Begin by applying the E-Brake and place wheel chocks on the tires to prevent the vehicle from rolling while under the dash.

Step 2:

Next using needle nose channel locks, clamp the middle of the factory spring to take some tension out of the spring.



Step 3:


With one hand depressing the clutch pedal, use the other hand to pull the upper spring perch away from the vehicle.

Step 4:

Remove the spring and both upper and lower perches from the vehicle.

Step 5:

Assemble the new SR Performance clutch spring using the factory spring perches.

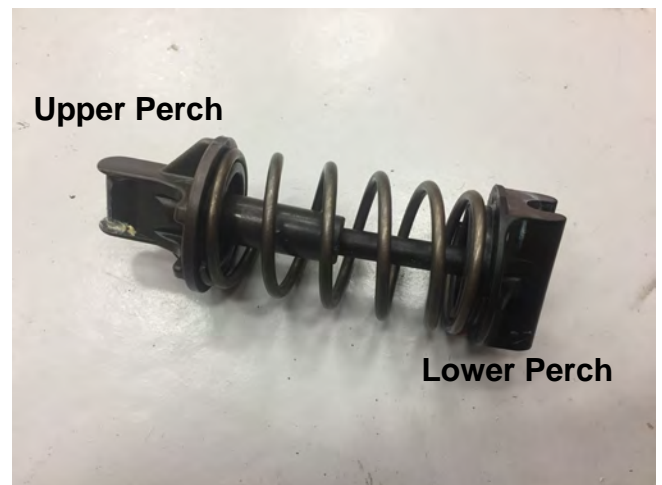

Step 6:

Reinstall the spring in the reverse order. Depress the clutch pedal with one hand and compress the spring enough to slip it into the upper spring perch.