

## 2005-2009 FOG LIGHT DELETES

**TOOLS REQUIRED** Flat-Head Screwdriver  
Trim Removal Tool

**ESTIMATED TIME** 1.5 Hours



Using a flat head screwdriver or trim removal tool, gently pry back the outer tabs securing the grille to the bumper support and remove it from the vehicle. Begin with the outside tabs, once they are loose, the grille can be pulled straight away from the vehicle



With the grille assembly removed, unbolt the four 7mm screws for the fog light mounting bracket and remove it from the grille (Some vehicles use Phillips head screws for the fog light mounting brackets).



Remove the 6 pins securing the plastic radiator cover and remove it from the vehicle.




Be sure to unplug the two electrical connectors for the fog light bulbs before completely removing the grille assembly.



Remove the fog light from the mounting bracket by pulling the tab back as shown above.

5

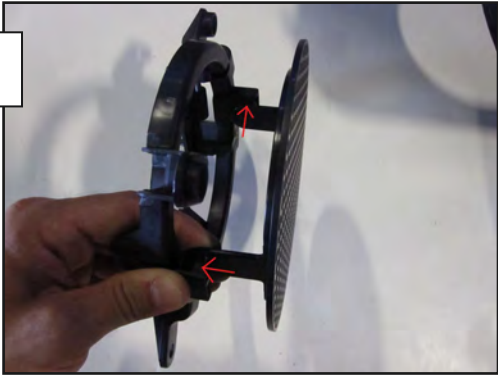


Install the fog light delete in the bracket by placing one end over the post and sliding the other end down over the clip as shown above.

7



Repeat Steps 3-7 for opposite side fog light. Once both fog light deletes are installed in the grille assembly, find a safe place to secure the factory wiring harnesses.

6

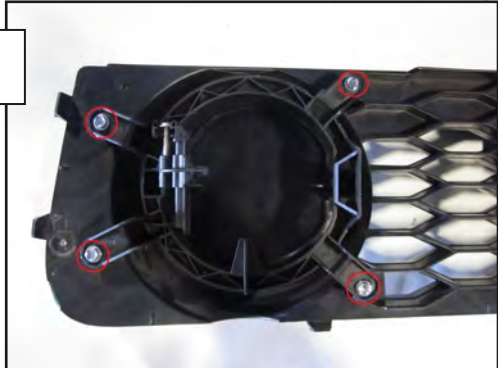

Re-install the fog light bracket to the grille assembly with the 4 screws removed in Step 3 .

8



Re-install the grille assembly into the front bumper cover by simply pushing it back in and letting the clips seat themselves. Re-install the plastic radiator cover to complete the installation.