



SMOKED TAIL LIGHTS

(2005-2009 MUSTANG ALL)

INSTALLATION INSTRUCTIONS

CONTENTS

(2) Tail Lights

TOOLS REQUIRED


Flat Head Screwdriver
11mm Socket or Wrench

STEP 1




Use a flat head screwdriver or trim panel removal tool to remove the (4) clips holding the plastic trunk panel in place.

STEP 2

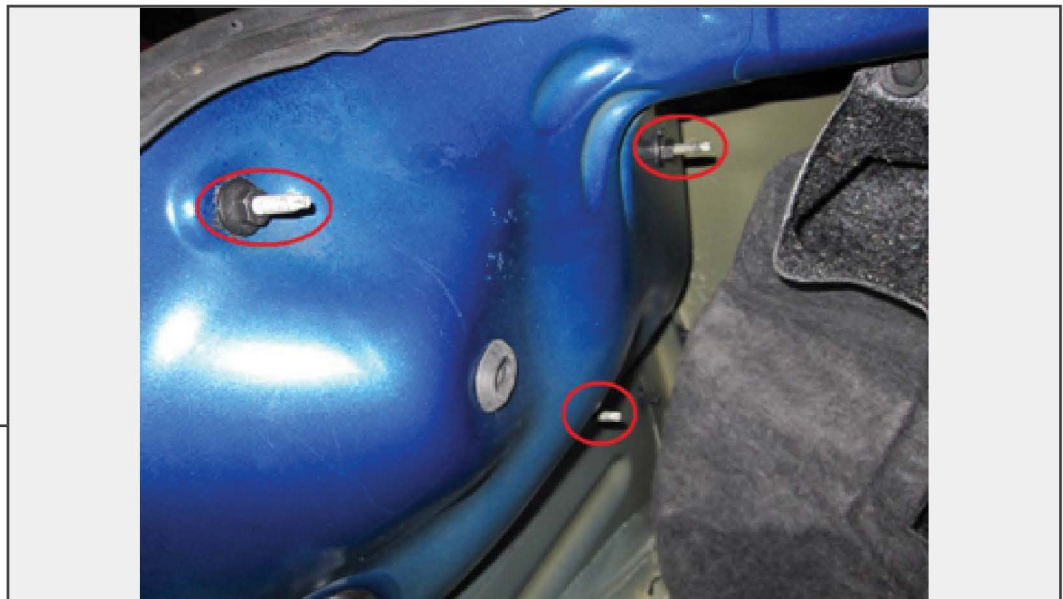


Use an 11mm socket or wrench to remove the (3) nuts holding the tail light to the vehicle.

STEP 3

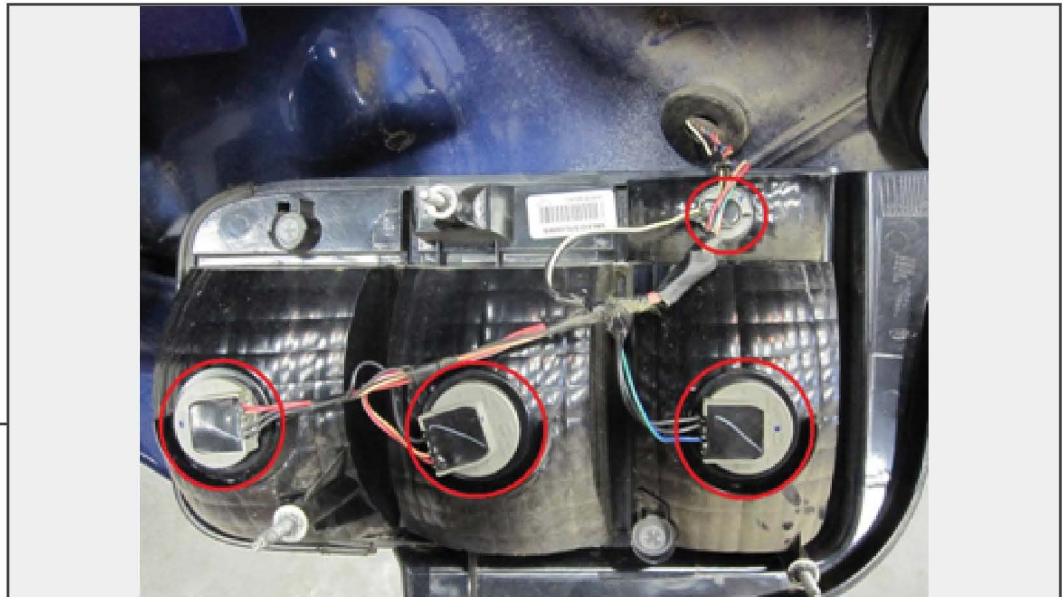

Remove the tail light housing from the vehicle and remove the bulb sockets by twisting them. Make sure to take note of each bulb's location so you can install them in the same order in the new housing.

STEP 4

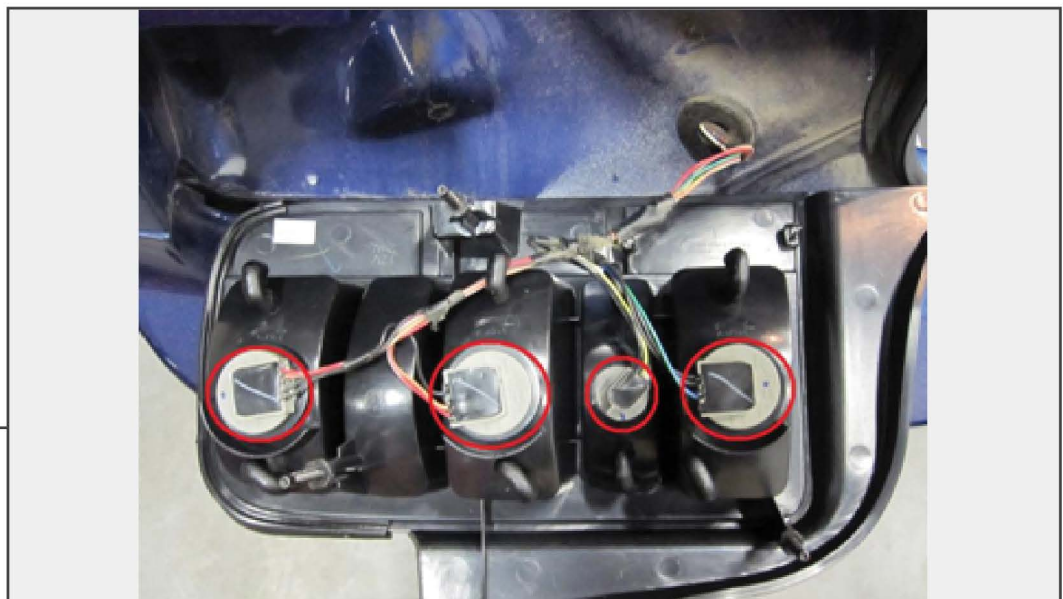

Place the bulbs in the new housing. The location of the reverse light bulb may be different depending on which Raxiom 2005-2009 Tail Light you purchased.

Before fully installing the lights, turn the vehicle on and test the turn signals, hazards, and brakes. If everything is working properly, reinstall the tail lights and truck panel.