


FR449 Install and Uninstall Instructions

Step1.

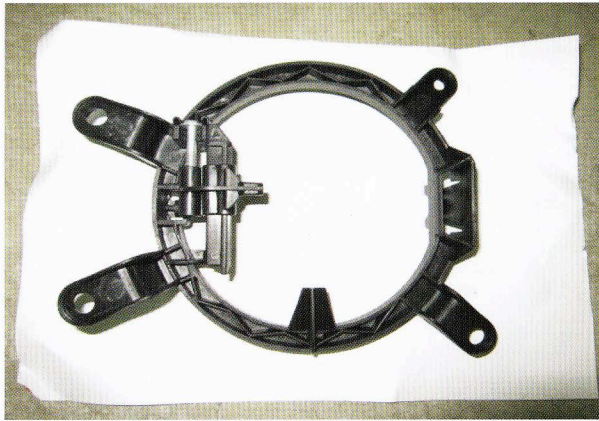


Step1. Remove the frame as shown from the original lamp

Step2.




Step2. Install the performance lamp to the frame as shown in photo step2

Step 3 :

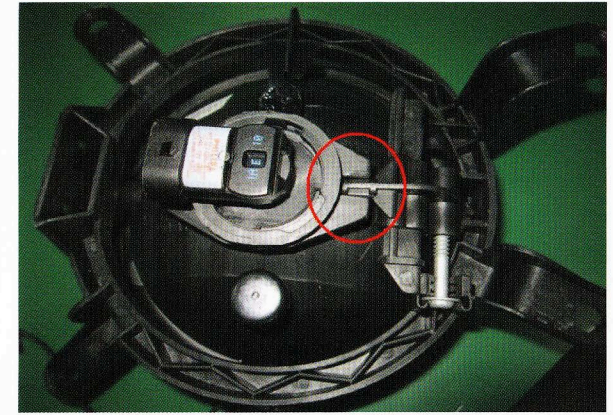


Step3. Twist the performance lamp in place according to photo step3

Step4 :

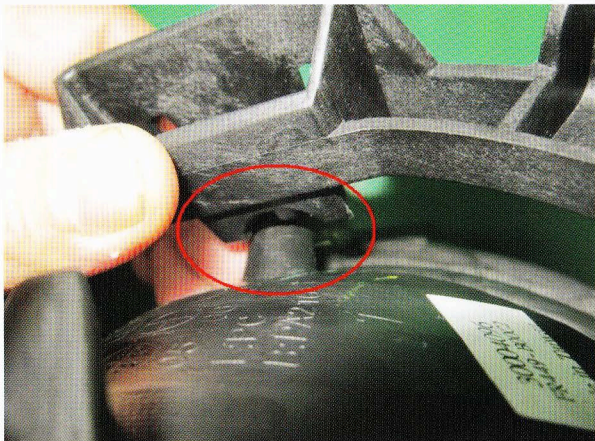


Step4. Make sure the lamp is installed firmly. Refer to photo step4

Step 5 :

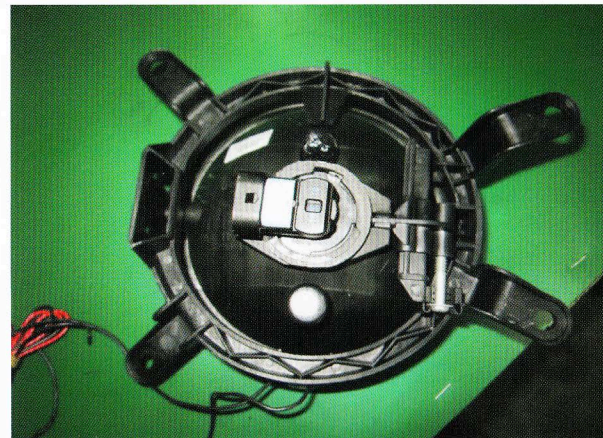

Step5. Install the assembly lamp to the car.

Step 6 :

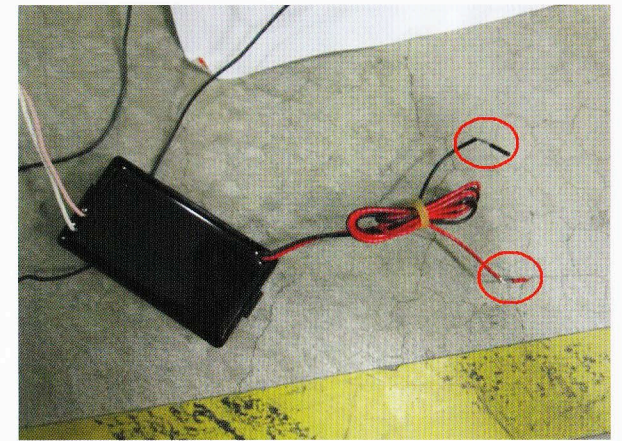

Step6. There are 2 wires on the IV box for the parking lamp: black is negative, red is positive. Please note that the IV box has a high voltage and make sure it is turn off while handling the wires.