

GEN5 TAIL LIGHTS

(2005-2009 MUSTANG All)

INSTALLATION INSTRUCTIONS

CONTENTS

(1) RH Tail Light
(1) LH Tail Light

TOOLS REQUIRED

Flat-Head Screwdriver
11mm Socket or Wrench

STEP 1




Use a flat-head screwdriver to remove the 4 clips holding the plastic trunk trim in place.

STEP 2



Unplug the wiring harness and use an 11mm socket or wrench to remove the 3 nuts holding securing the tail lights. Push out the rubber grommet, where the harness feeds through the sheet metal, and remove the light.

STEP 3

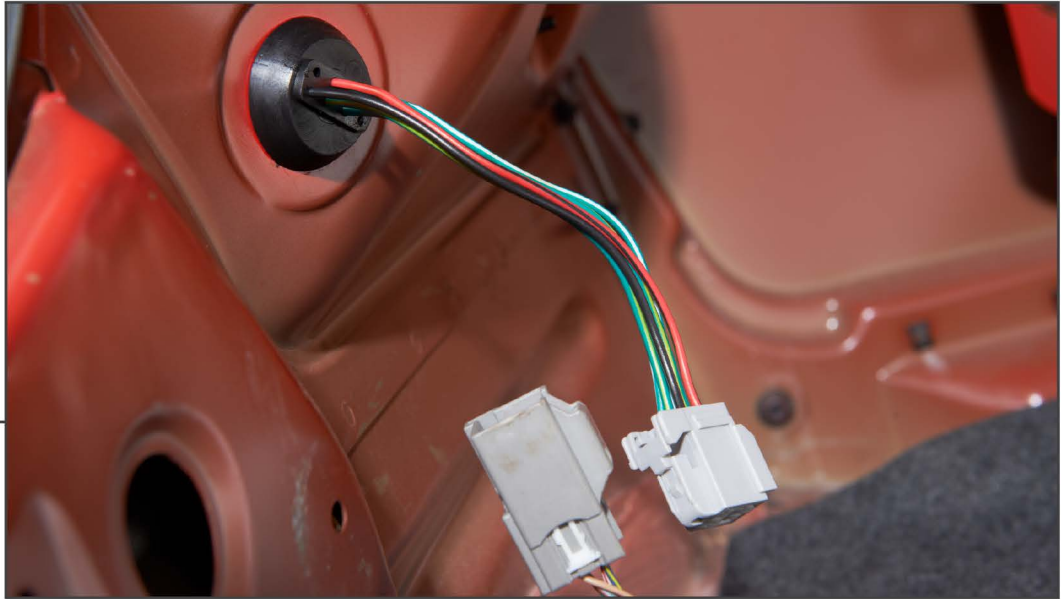

Feed the wiring harness through the hole, making sure the rubber grommet is seated properly as pictured.

STEP 4



Reinstall the light, securing it with the 3 factory nuts removed in step 2. Repeat for opposite side.