

r a x i o m

advanced lighting solutions

Directional Side View Mirrors (05-09 All)

Tools Required:

- 6mm-11mm Sockets
- 7/16" Socket
- Flathead Screwdriver
- T-30 Torx Driver
- Wire Stripper/Crimping tool

Mirror and Door Panel Removal Driver and Passenger Side




Step 3: Remove the 3 Bolts holding the old mirror in place.



Step 1: Remove the driver's side mirror control panel by pulling away from the door



Step 4: Pull the inner door handle out and pop the inner cover out exposing the torx screw below.

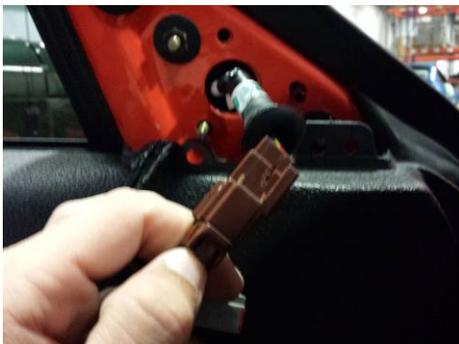

Step 2: Disconnect the harness connecting the door to the mirror control panel



Step 5: Pull the window control assembly towards the interior of the vehicle to remove it.



Step 6: Disconnect the wiring harness connected to the window switches and remove the 7mm screw behind it from the vehicle.



Step 9: Remove the 7mm screws located around the outer part of the door panel and pull the panel up and away from the door.



Step 7: Using your fingers or interior trim removal tools, pull the panel behind the door pull out and up to remove it from the vehicle.



Step 10: Unplug all connectors holding the panel to the door leaving the door handle cable attached.



Step 8: Remove the T-30 torx screw behind the door pull and the door handle.


Raxiom Mirror Wiring Directions Driver and Passenger Side



Step 1: Route the wire through the door panel and into the harness that passes through the vehicle.




Step 2: Remove the interior kick panels and door sill panels.

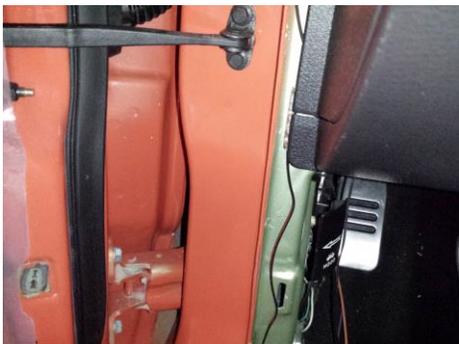

Step 3: Using a stiff wire tool, route the tool into the harness to pull the wires into the interior of the vehicle.



Step 4: Locate the wiring harness that runs down each door sill and expose the wires within.

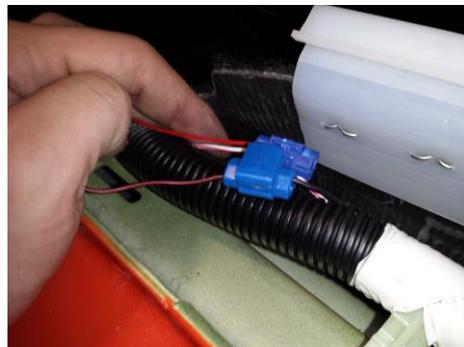

Step 5: Wire the mirrors into the vehicles harness using the supplied wire splices.

DRIVERS SIDE – Tap into the WHITE/RED wire with the positive (red) and ground the black wire to the black wire in the harness

PASSENGER SIDE – Tap into the DARK PINK/WHITE wire with positive (red) and ground the black wire to the black wire in the harness

Step 6: Test the mirrors to ensure proper operation.

Step 7: Install the Raxiom Mirrors and reverse steps 1-10 in the previous section to reinstall the door panel.