

2005-2012 Ford Mustang Fog Lights

Contents:

(2) - foglights

Tools Needed:

painters tape 7mm socket
socket wrench small screwdriver




It is recommended that you have an additional person available to help during this installation, parts can be awkward to hold and support by yourself. Block wheels and set parking brake before beginning work. Disconnect the negative (-) battery cable. It is suggested that painters tape be installed on the top of the bumper, in front of the grill to protect the paint.



05-09 CARS: Remove the (6) push pins, holding the radiator cover to the car. Remove the radiator cover, by pulling up on the back of it and pulling it toward the back of the car.

1B

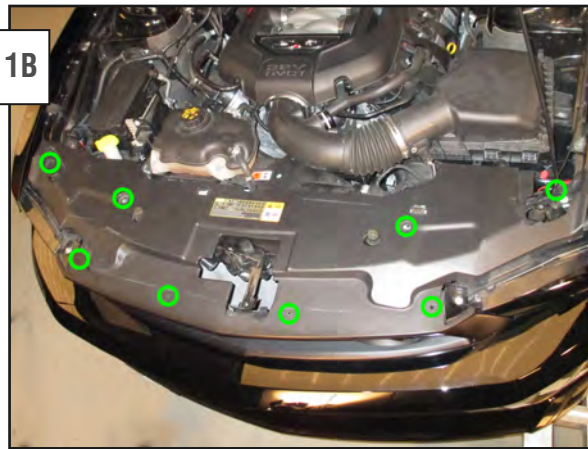


10-12 CARS: Remove the (8) push pins, holding the radiator cover to the car, by prying them with a small screwdriver. Remove the radiator cover, by pulling up on the back of it and pulling it toward the back of the car.

2B




10-12 CARS: Press in on the grill tab, until the lip securing grill into the front bumper is released. Move on to the lower tab, then over to the opposite side. There are tabs along the bottom of the bumper that will come loose with some force. Be careful, to keep from breaking the tabs or the bumper.

2A

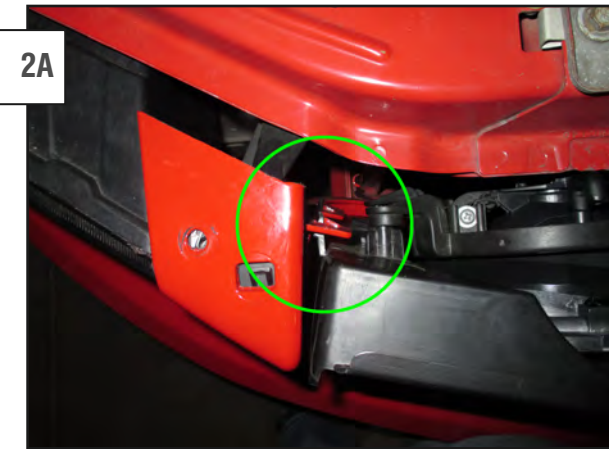

05-09 CARS: Press in on the grill tab, until the lip securing grill into the front bumper is released. Move on to the lower tab, then over to the opposite side. There are tabs along the bottom of the bumper that will come loose with some force. Be careful, to keep from breaking the tabs or the bumper.

3

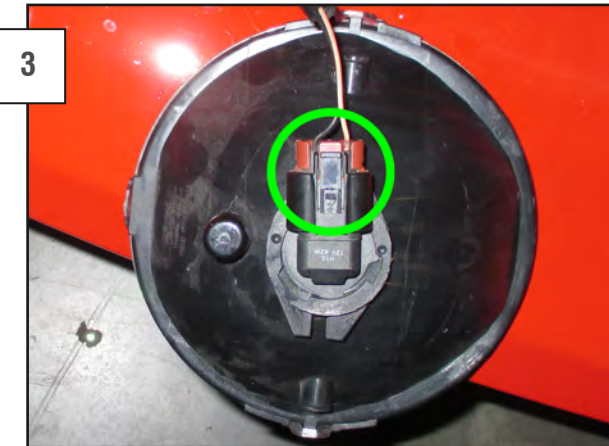

05-12 CARS: Press down on the electrical connector to release the fog light harness from the fog lights.

4




05-12 CARS: Remove the (8) 7mm screws securing the fog light mounts to the grill. (05-09 grill pictured, 10-12 looks different, but mounts are similar.)

5



05-12 CARS: (foglights have been removed for illustration purposes) Be sure to mentally record how the fog lights are mounted with the vent on the top side. Pull the inner mount tab away from the fog lights. When it is released, pull the inner side of the fog light away from the mount and the outer will follow. Reinstall the lights in the reverse order, insert the outside of the mount into the light, then lower the inner side of the light to the mount until it snaps in.

6

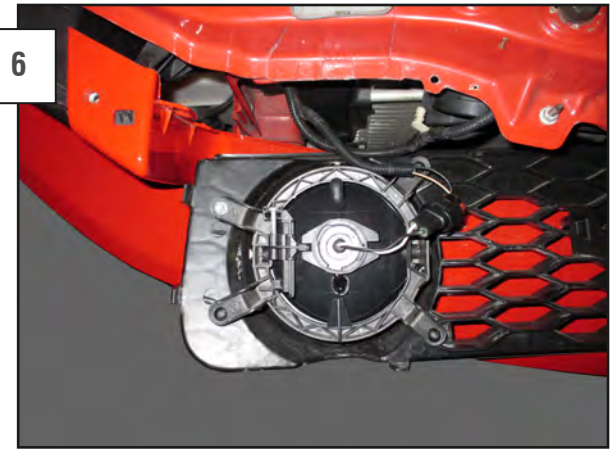

Reinstall the light mounts. Plug the vehicle harness into the back of the lights and push the grill back into the car, making sure the wires aren't near the radiator or other sharp/hot parts. Reattach the negative battery cable and make sure the lights are working. There is a screw on the back side of the fog lights that can be turned to adjust the beam up or down.