


## Installation Instructions for JLT V3.0 Satin Oil Separator - Passenger Side (11-17 GT; 12-13 Boss; 15-17 GT350)

**Installation Time:** 10 minutes

**Tools Required:**

- ✓ Fender cover (optional)
- ✓ Soft blanket (optional)

**Step 1:** Remove engine cover for easy access

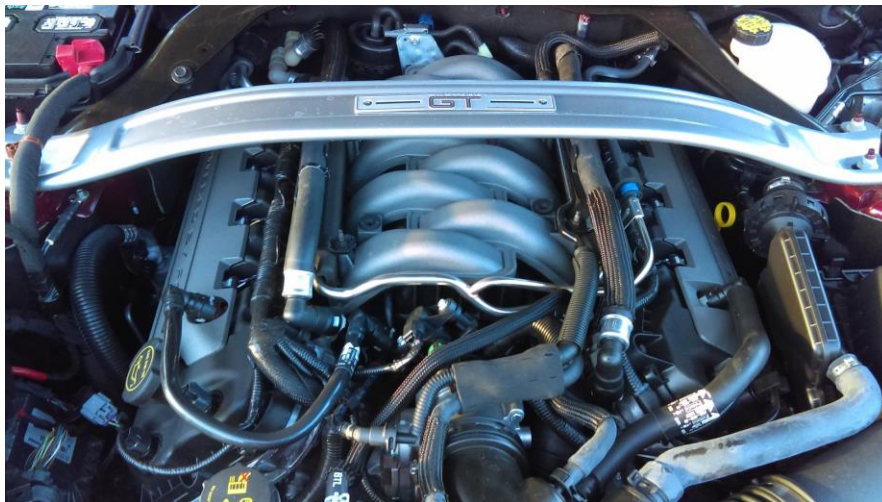

**Step 2:** Locate PCV hose ends Left and Right





**Step 3:** Press down on grey clip and release the connector




**Step 4:** Install your NEW JLT3.0 Oil Separator (supplied with factory connections for plug and play install)



**Step 5:** Replace engine cover and installation is complete. Congratulations on a great investment for the longevity of your Coyote 5.0!!!



## Before/After

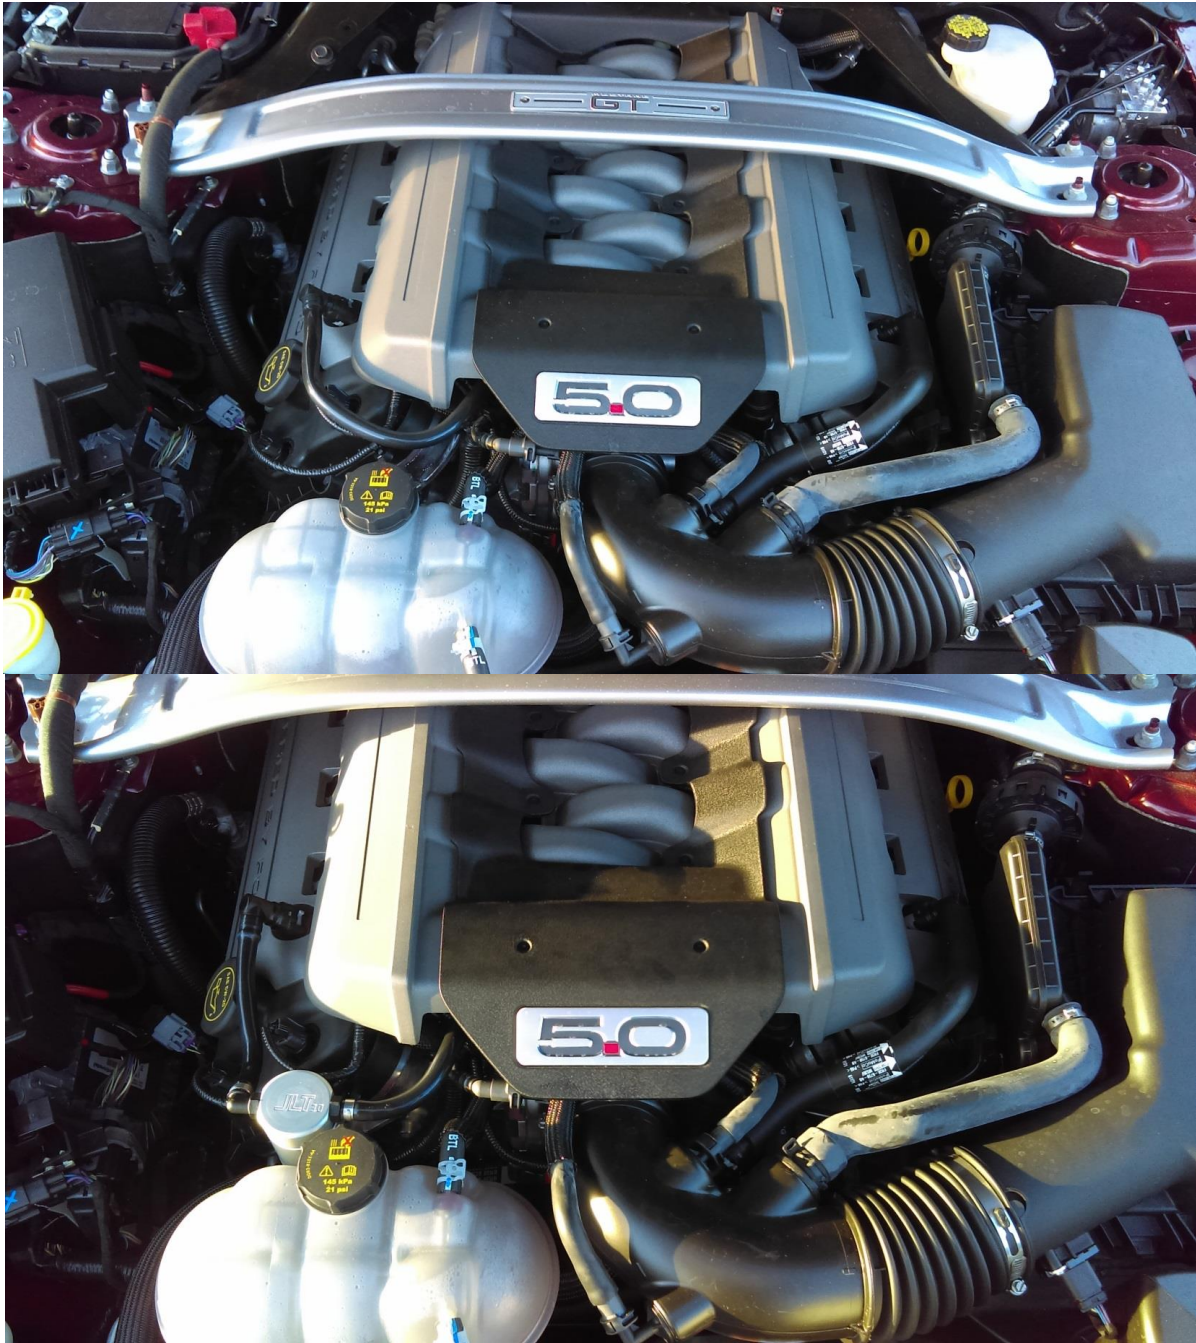

“Installation Instructions Created and Submitted by AmericanMuscle customer, James B. – August 10<sup>th</sup> 2016. Work completed on “Dorothy” his ’16 Mustang GT w/PP”