

Window Switch Plate - Coupe (05-09 All)

Required Tools:

Flat blade Screw Driver

or

Trim and Molding Tool Set



Installation Time: 30mins

1. Take a flat blade screw driver or a trim and molding tool to pry up the factory window switch plate



2. Once it has been lifted up a little bit, you can use your hand to pull the switch plate off.




3. You would need to take off the 2 retainer clips off the factory switch and transfer over to the new window switch




The clips will be tight to put on, you can use the handle side of the screw driver and tap the retainer clips on the new switch to keep them secure.

4. You will need to pry back the clips to remove the window control module from the plate. There is clips on both sides of the module.

****Note: The plastic clips is thin so it can break easy****

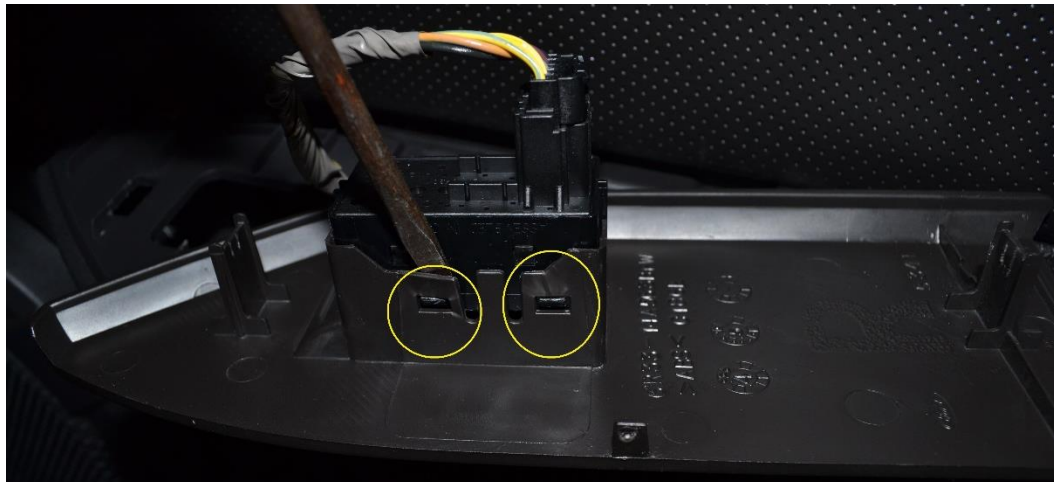

5. Once the control module is removed, transfer over to new window plate

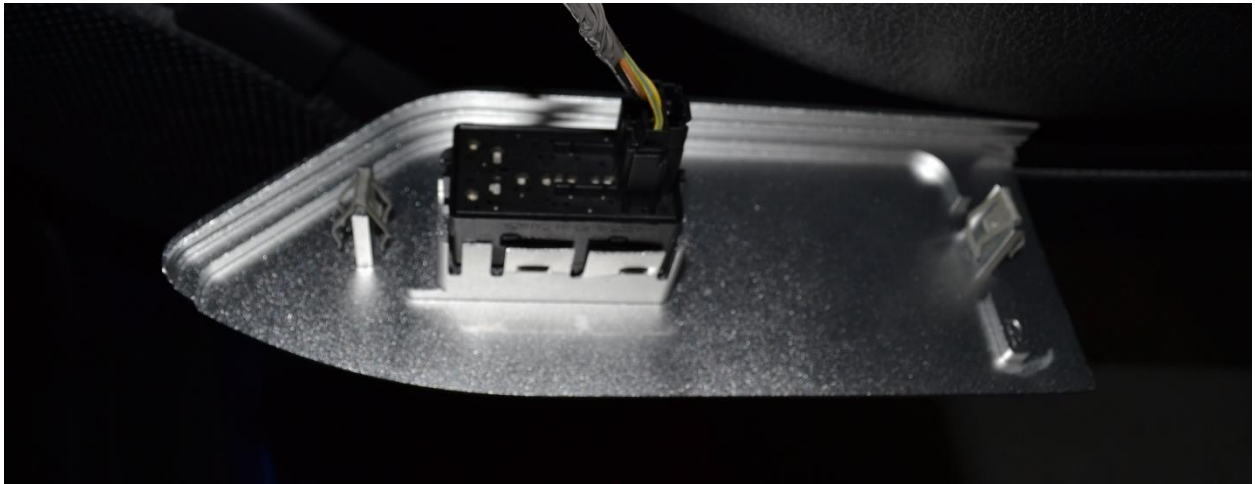

****Note: You may need to bend the clips back on the new plate to allow the module to be installed, then you can bend the clips back in to secure the module in place****

6. Install the plate back into position, repeat steps 1-6 to install the other side, and the installation is complete.



Installation Instructions written by AmericanMuscle Customer Matt Majka 3/16/2015