

How to Install Tail Lights for 2005-2009 Mustang



The below installation instructions work for the following products:

- [Raxiom Smoked 2010 Style Tail Lights \(05-09 All\)](#)
- [Raxiom 2010 Style Tail Lights \(05-09 All\)](#)
- [Raxiom Smoked Tail Lights \(05-09 All\)](#)

Here at American Muscle, we're all about DIY (do it yourself). Of course, there's nothing wrong with seeking out a little bit of tech help prior to taking on an installation on your own. Our Mustang installation guides will provide valuable instructions and hopefully answer any how-to questions that you may have along the way.

Installation Instructions for 05-09 Mustang Tail Lights

Tools needed:

- Flat-Head Screwdriver
- 11mm Socket or Wrench

Installation:


1. Use a flat-head screwdriver to remove the 4 clips holding the plastic [trunk trim](#) in place.




2. Use an 11mm socket or wrench to remove the 3 nuts holding the tail light to the vehicle.



3. Remove the tail light housing from the vehicle and remove the bulb sockets by twisting them. Make sure to take note of each bulb's location so you can install them in the same order in the new housing.

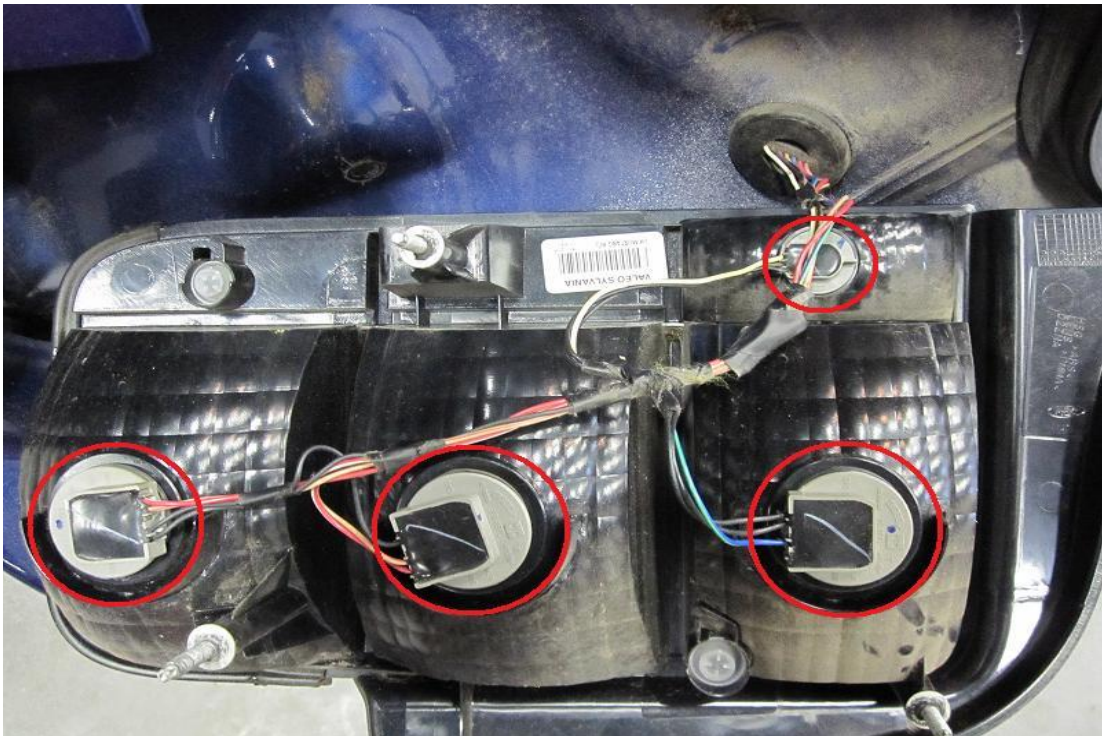

4. Place the bulbs in the new housing. The location of the reverse light bulb will change slightly if you are installing the 2010 style tail lights (shown below).

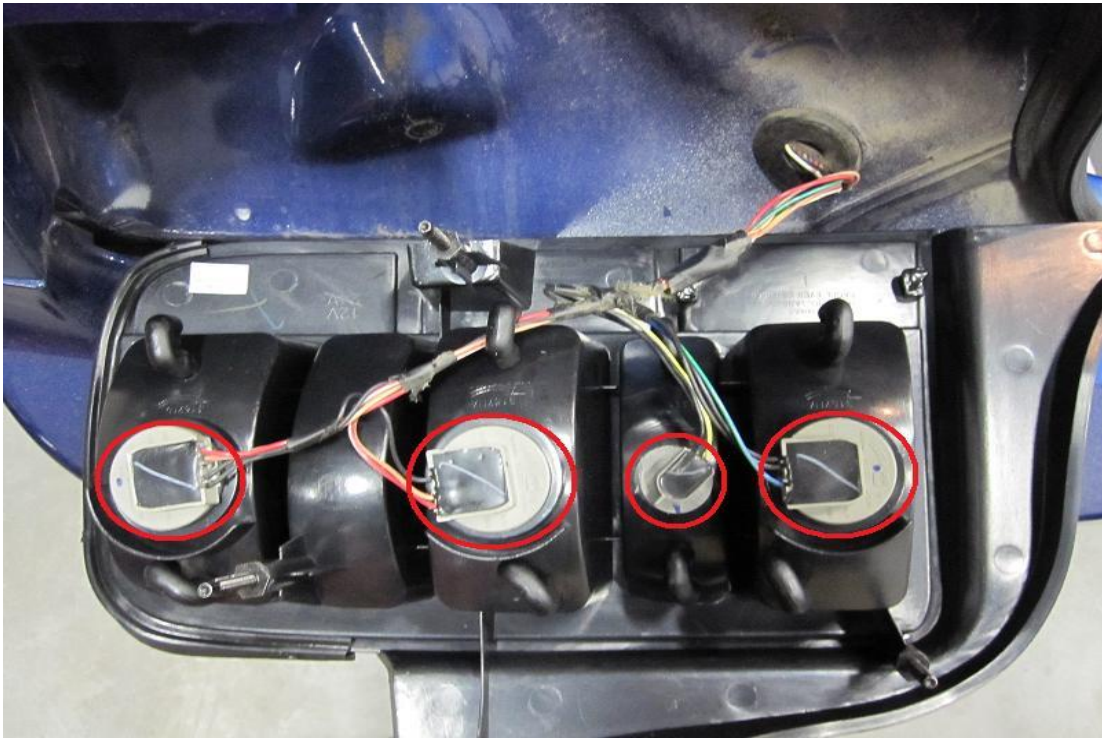

5. Repeat Step 2-4 for the other side of the vehicle. Once the lights have been tested and work properly, re-install them onto the vehicle and replace any trunk trim that was removed to complete the installation.