

**Contents:**

- (1) Louvers (Pair)
- (2) Alcohol Wipe
- (1) Adhesion Promoter


****Installation Note:** Louvers should be installed when the ambient air temperature is between 70-90 degrees Fahrenheit**

Pre-Painted Quarter Window Louvers

Step 1// Begin by thoroughly cleaning the quarter window glass and surrounding painted surfaces with soap and water to ensure the cleanest possible mounting surface. Once the surfaces are dry wipe the areas down with the supplied alcohol wipes.

Step 2// Next test fit the louver to the vehicle to familiarize yourself with the mounting location.

2005-2014 The louver will fit around the quarter glass and attach to the painted surface.

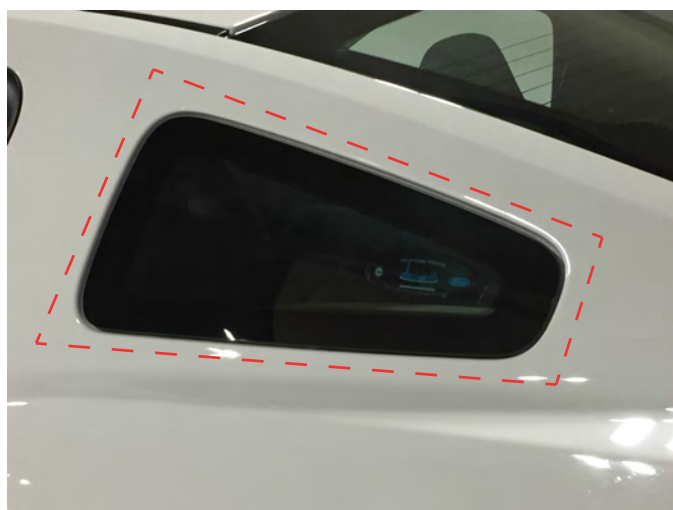

2015-2018 The louver will attach to the quarter window glass.



Step 3// Once you are comfortable with where the parts mount remove the tape backing. Apply the supplied adhesion promoter to the tape surface then install the louver to the vehicle.

Step 4// Apply firm even pressure on all tape location to ensure proper adhesion.

Maintenance: Wash the louver by hand using automotive car wash. Avoid brush style car washes.